


# Premium AOC (Active Optical Cable)

## Features

- 光ファイバーケーブル
- プラグアンドプレイ
- EMI/RFIフィルター
- 曲率半径2mm
- Full HD, 4K
- HDMI CEC / HDCP
- 拡張電源未使用
- 軽量でコンパクトなフレキシブルケーブル

## USB 3.1/3.0(UBO)

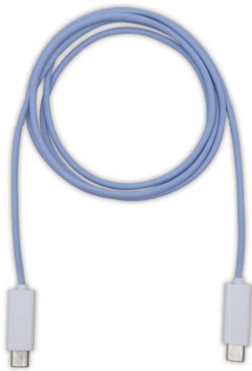

USB 3.0



USB 3.1

### Specifications


Length	1.2m	10m
Cable diameter	3mm	
Connector type	USB Type-C	
Standard	USB 3.1	
Transmission speed	Upto 10Gbps	
Feature	Backward Compatibility	

Detachable Feature

## DisplayPort 1.3 (UPO)



Pulling through conduit



Detachable Feature

### Specifications

Supported data rate	•32.4Gbps(8.1bps/Ch)
Videofomat	•2160p UHD •4 K 60Hzat chromasampling [4: 4 : 4] •3 D and deepcolor
Supported features	•HDCP 1.3,2,2
Cable diameter	•5.10mm x2.90mm
Length	•3 m~ 50m
Operatingtemperature	•-20°C to75°C

## HD/3G-SDI (USM)



### Specifications

Supported data rate	•3G-SDI(2.970Gbps), HD-SDI(SMPTE-292M)
Powersupply	•DC5V only / DC12V & AC24V
Operatingtemperature	•-20°C to75°C
Videofomat	•3G/HD-SDI
Optical cable	•OM3 multi modefiber
Connector	•SD I BNC input connectorand ST terminated fiber optical connector

## HDMI 2.0 (UHT)



Length available up to 50m

### Specifications

Supported data rate	•18Gbps(6Gbps/Ch), upto 37.5Gbps
Videofomat	•2160p UHD •4 K 60Hzat chromasampling [4: 4 : 4] •3 D and deepcolor
Supported features	•HDCP 2.2,HDR
Cable diameter	•5.10mm x2.90mm
Length	•3 m ~ 50m
Operatingtemperature	•-20°C to 75°C

## HDMI (UHO)



Length available up to 100m

### Specifications

Supported data rate	•10.2Gbps[3.4Gbps/Ch]
Videofomat	•1080p FullHD, •4 K 60Hzat chromasampling [4:2:0] •3 D and deepcolor
Supported features	•HDCP, HDMI-CEC
Cable diameter	•5.10mm x2.90mm
Length	•3 m ~ 100m
Operatingtemperature	•-20°C to 75°C

## Mobile HDMI (UMO)




### Specifications

#### High Speed Micro HDMI D to A Cable Ultrathin and transparent cable

Active optical cable with plastic optical fiber No external Power



## DVI (UDO)

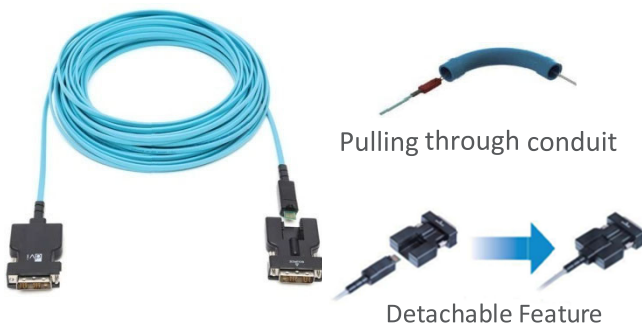

Pulling through conduit

Detachable Feature

### Specifications

Videofomat	•WUXGA (1920x1200@60Hz) •UXGA (1600x1200@60Hz) •Up to 1.65Gbps/ch
Supported features	•HDCP
Cable diameter	•5.10mm x2.90mm
Length	•10m ~100m
Operatingtemperature	•-20°C to 75°C



<http://www.wd-s.com>  
株式会社WDS

〒170-0005 東京都豊島区南大塚3-50-1-412  
TEL:03-6869-7561 info@wd-s.com