



EG-Keeper

初期起動設定マニュアル

2020/9/2

ダブリューディーエス
株式会社WDS

起動初期設定

(WEB設定編)

EG-Keeperには予め初期設定(192.168.1.100)がされております。
EG-KeeperとPCは同一ネットワーク内でしか動作しないため、WEB設定画面をご利用いただく前に、
PCにIP割り当て(192.168.1.XX)をする必要があります。
↑の部分は100以外の任意の数字。


また、EG-KeeperのAP(アクセスポイント)にWiFi接続する場合は、

SSID :EG-Keeper-(マックアドレス)
PW(ネットワークセキュリティキー) :wds0123456789

で接続します。WiFi接続の場合はブラウザで、以下に接続して下さい。

URL :http://192.168.2.1:8080

WEB設定画面を初めてご利用いただく場合は、以下の手順を実施ください。

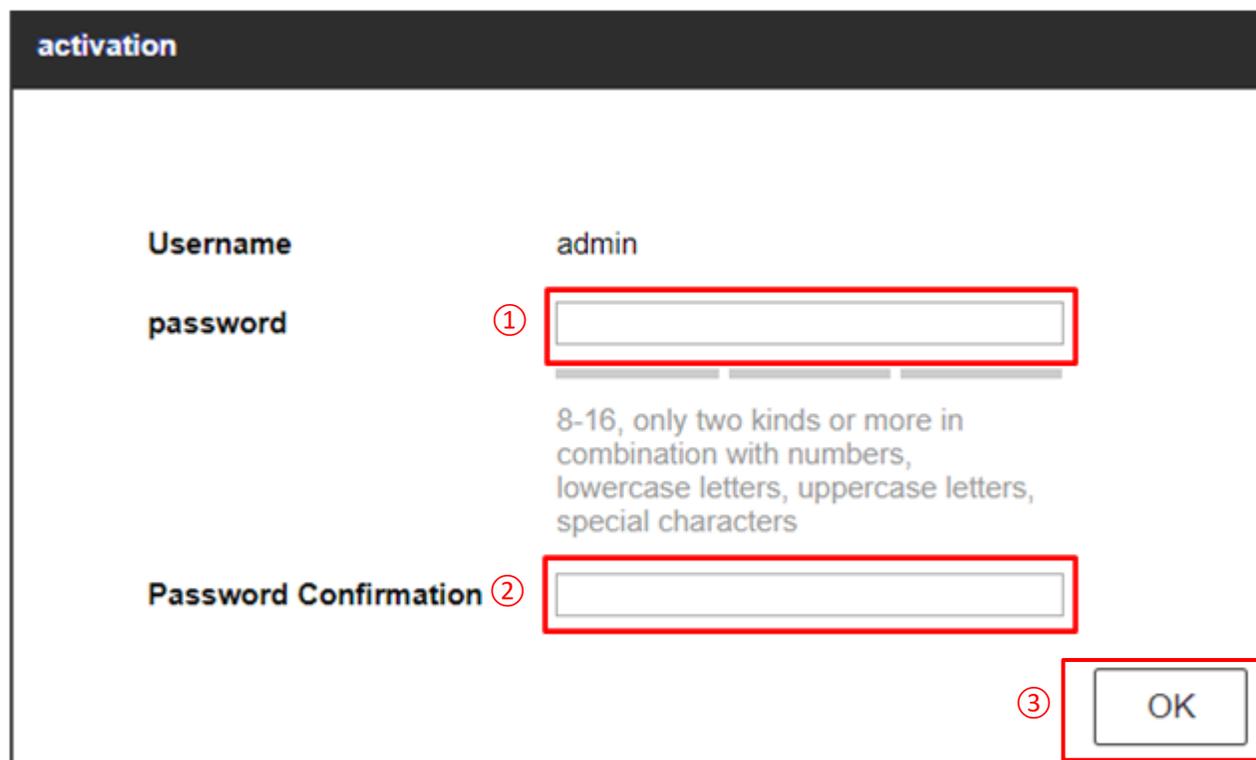


PCとEG-KeeperをLAN接続後に電源を投入、ブラウザで<http://192.168.1.100:8080>にアクセス。

① activationより、“password”の初期値である“wds123-WDS123”を入力。

② ①と同じpassword admin123 (2020/10/13以降出荷分) wds123-WDS123 (2020/10/13以前)を再度入力。

③ OKをクリックし次画面へ遷移。

Answerについては、以下の手順を実施ください。

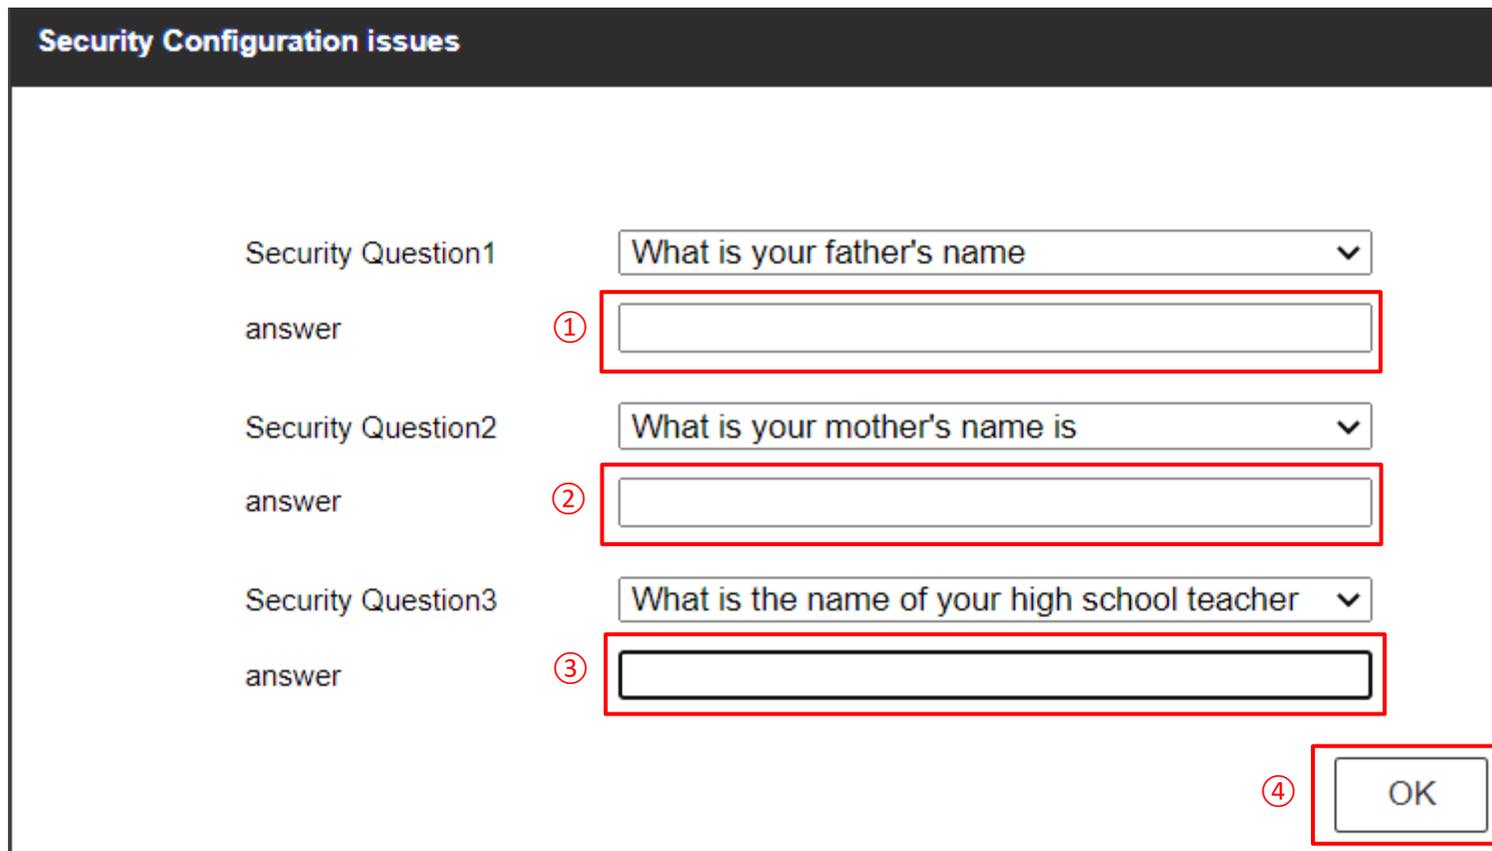


Security Configuration issues

Security Question1	What is your father's name	▼
answer	①	<input type="text"/>
Security Question2	What is your mother's name is	▼
answer	②	<input type="text"/>
Security Question3	What is the name of your high school teacher	▼
answer	③	<input type="text"/>

④

① ~③の各Questionにそれぞれ任意のAnswerを入力。

④OKをクリックし設定画面へ遷移。

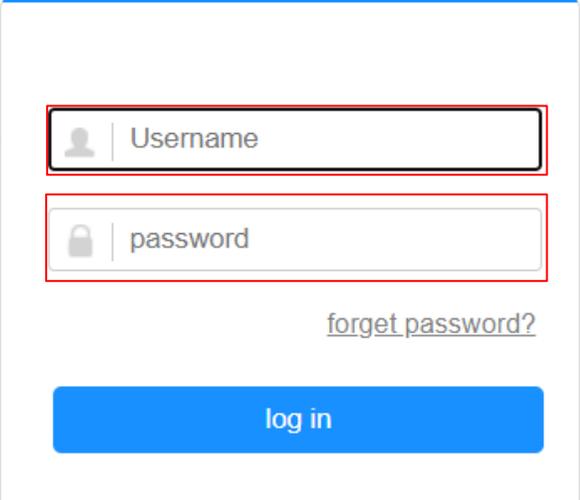

① Username

② password

[forget password?](#)

log in


WiFi接続後に、ブラウザで<http://192.168.2.1:8080>にアクセス。

- ① User nameに初期値である”admin”を入力。
- ② password” に初期値である admin123 (2020/10/13以降出荷分) wds123-WDS123 (2020/10/13以前) を入力。
- ③ Log inをクリックし次画面へ遷移。

起動初期設定

(PCツール編)

PCツールにLog inする場合、以下の手順を実施ください。

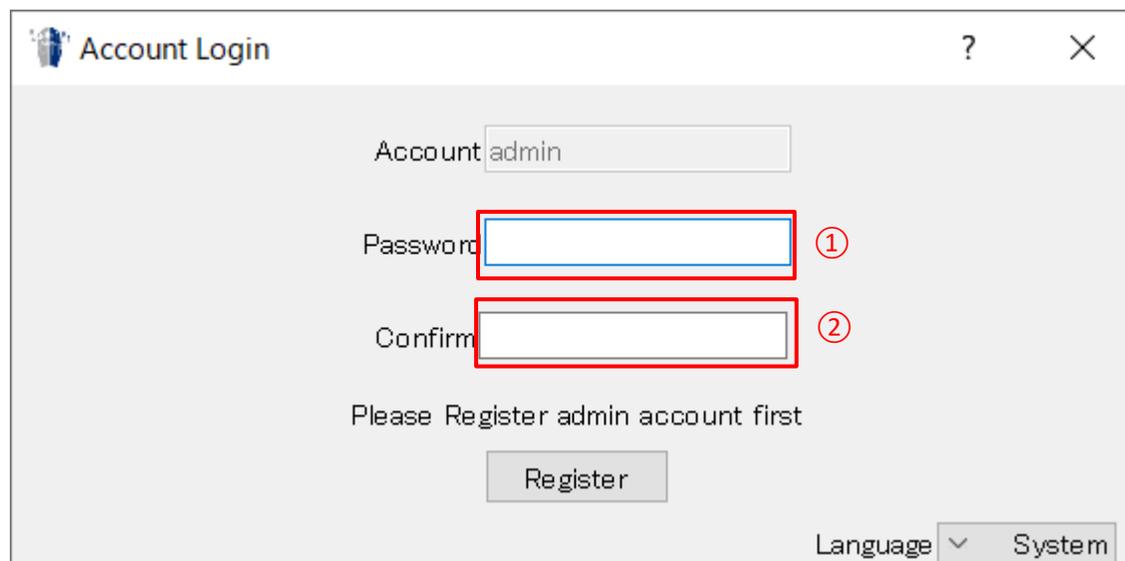

Account Login

Account admin

Password ①

Confirm ②

Please Register admin account first


Register

Language System

① Password に6文字以上の”任意のパスワード” を入力。

② ①と同じ.”任意のパスワード”を再度入力。

Registerをクリックし登録する。

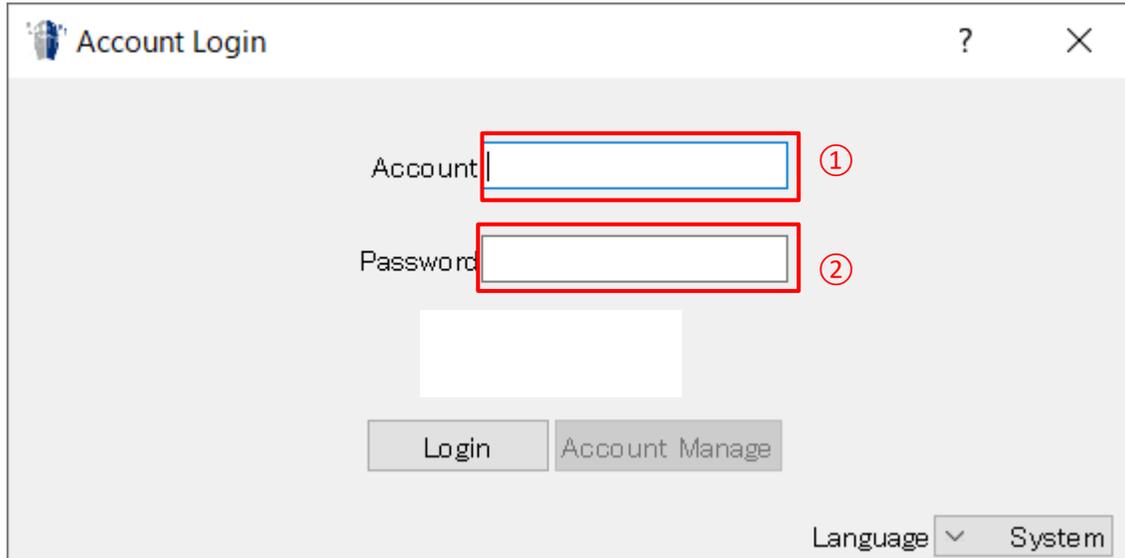


Account Login

Account ①


Password ②

Language

- ① Account に”admin” を入力。
- ② Passwordに先ほど登録した”任意のパスワード”を入力。
Log inをクリックし画面遷移する。

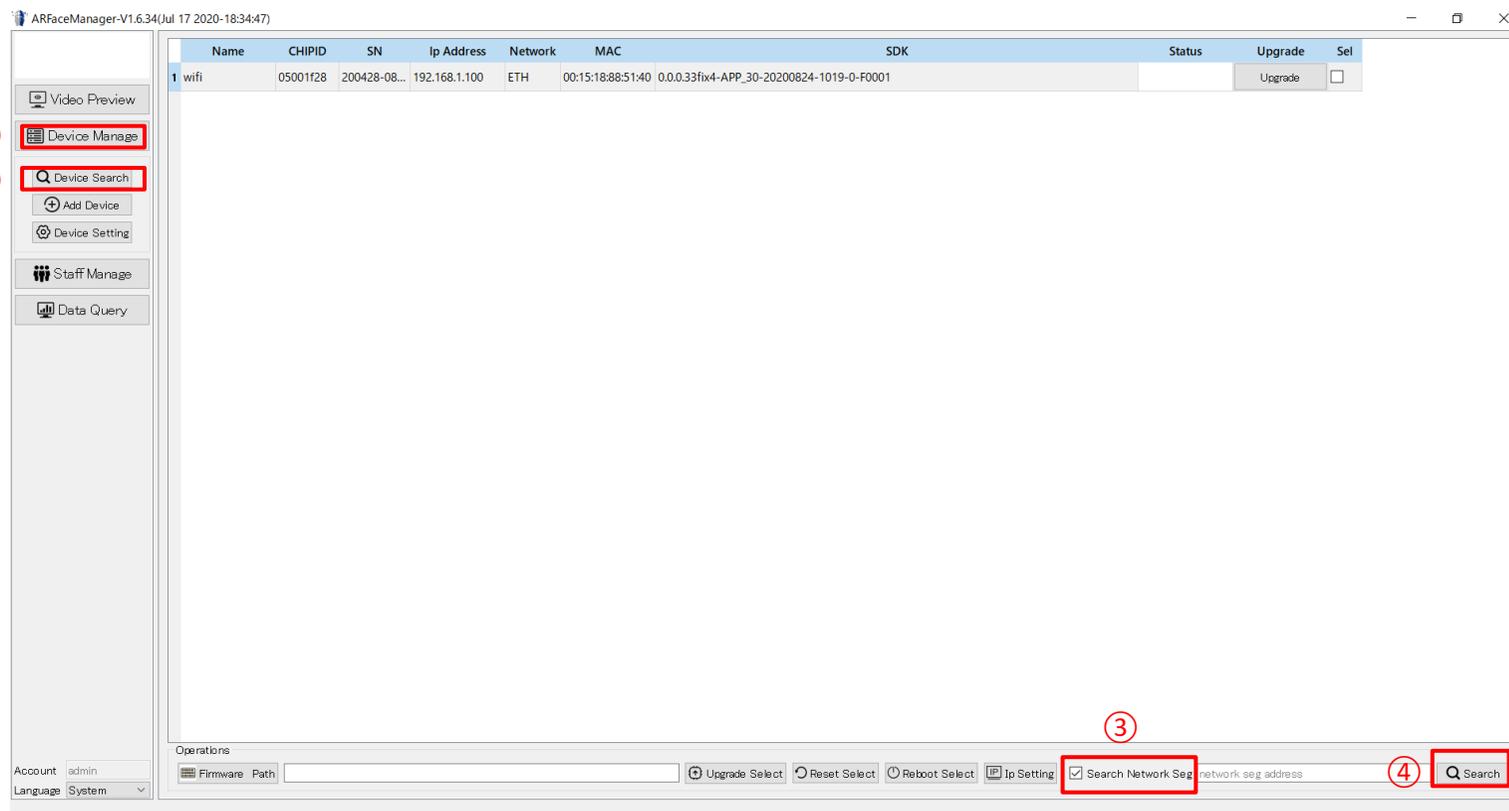

- ①画面左側のDevice Manageを選択。
- ②Devive Searchを選択。
- ③画面下部のsearch network segにチェックを入れる。
- ④画面下部右側のSearchをクリック。

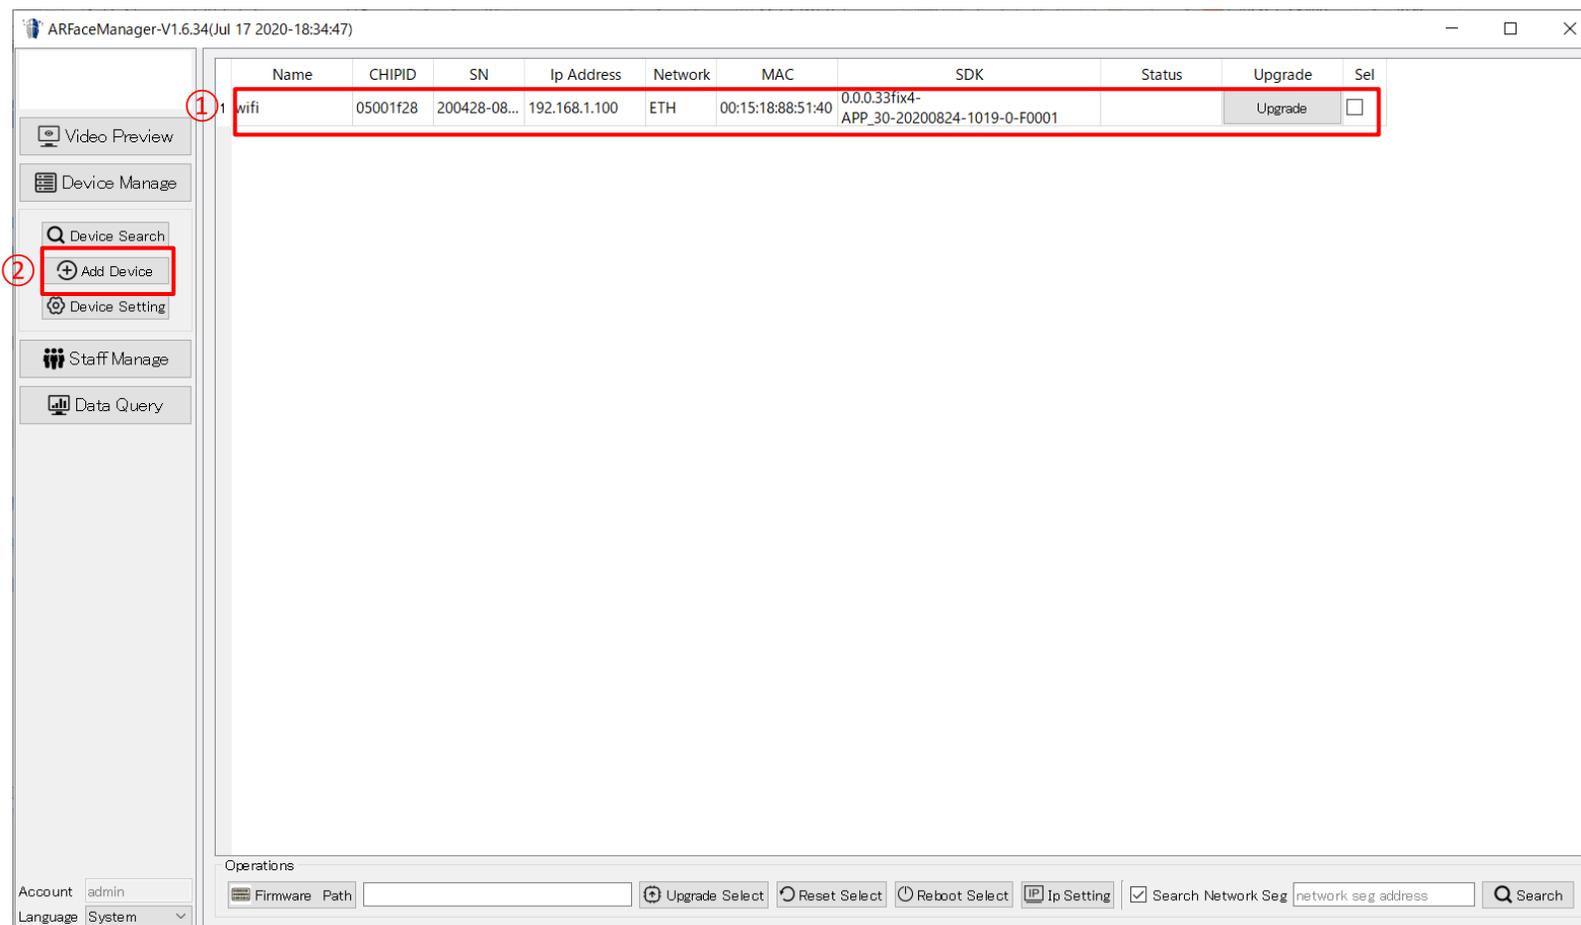


The screenshot shows the ARFaceManager-V1.6.34 interface. On the left sidebar, the 'Add Device' button is circled with a red '2'. In the main table, the first row is circled with a red '1'. The table has the following data:

Name	CHIPID	SN	Ip Address	Network	MAC	SDK	Status	Upgrade	Sel
wifi	05001f28	200428-08...	192.168.1.100	ETH	00:15:18:88:51:40	0.0.0.33fix4-APP_30-20200824-1019-0-F0001		Upgrade	<input type="checkbox"/>


At the bottom, there are 'Operations' buttons: Firmware Path, Upgrade Select, Reset Select, Reboot Select, Ip Setting, Search Network Seg (with a checked checkbox and a text input field containing 'network seg address'), and Search.

- ①画面上部にDeviceの行が出現したら、
- ②画面左のAdd Deviceを選択。

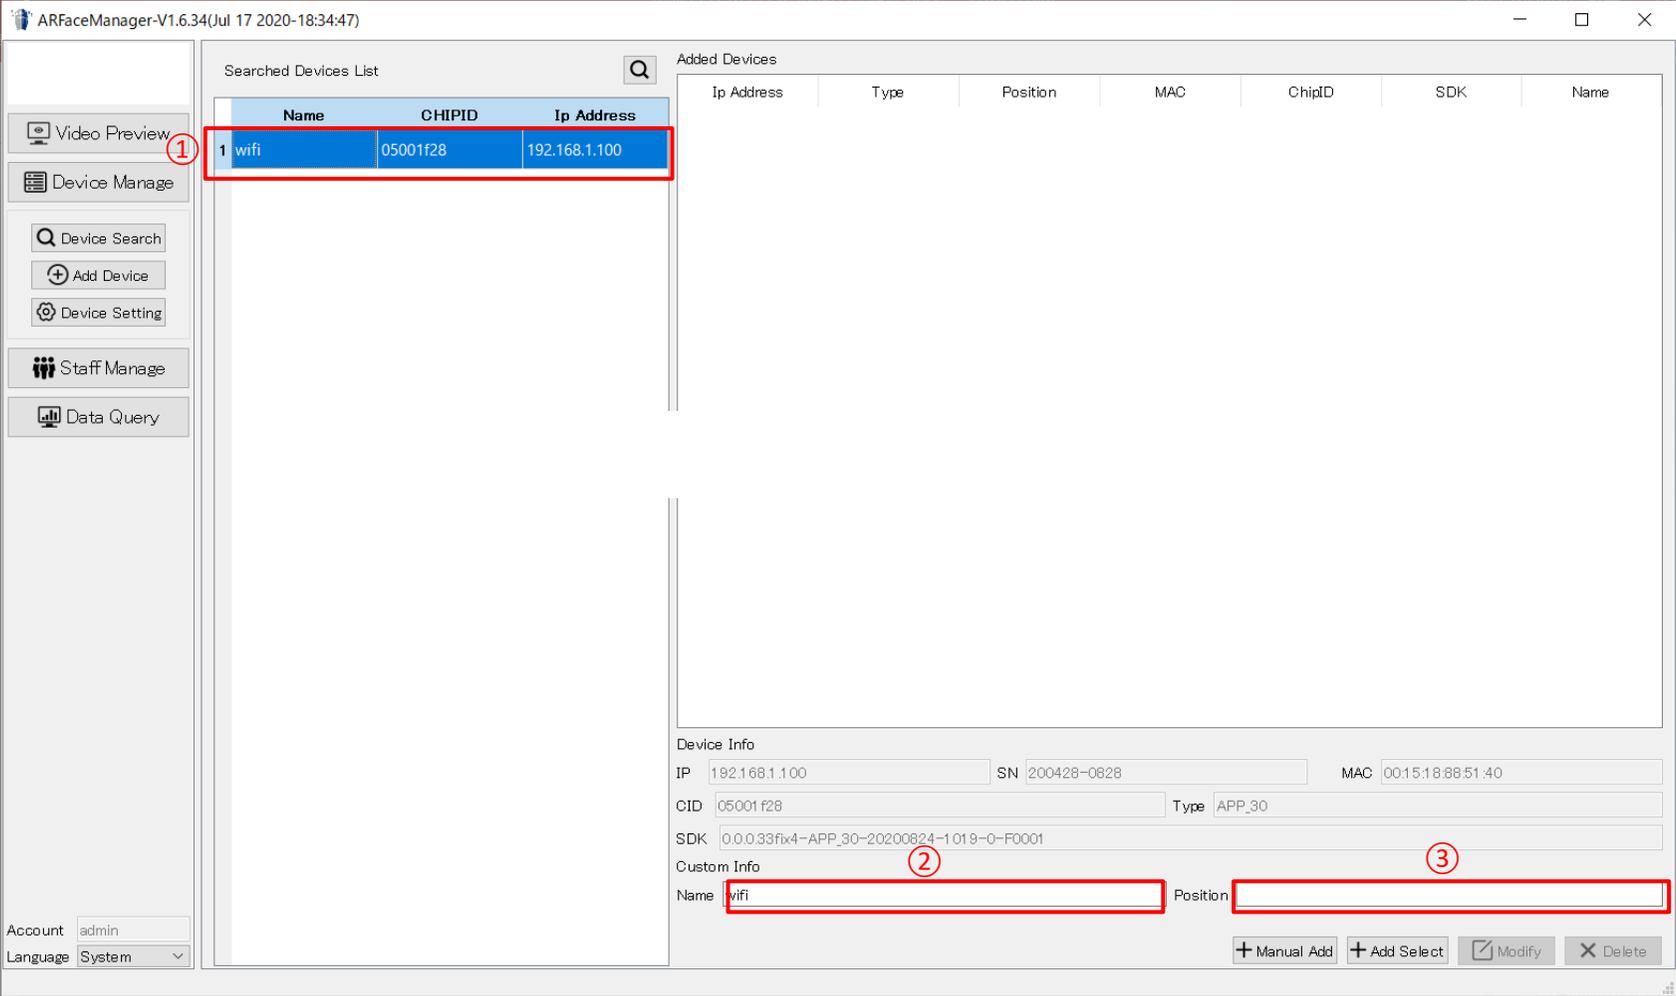

The screenshot shows the ARFaceManager-V1.6.34 interface. On the left is a sidebar with navigation options: Video Preview, Device Manage, Device Search, Add Device, Device Setting, Staff Manage, and Data Query. The main area is divided into 'Searched Devices List' and 'Added Devices'. The 'Searched Devices List' table has columns for Name, CHIPID, and Ip Address, with one row containing '1', 'wifi', and '192.168.1.100'. The 'Added Devices' table has columns for Ip Address, Type, Position, MAC, ChipID, SDK, and Name. Below these tables is a 'Device Info' section with fields for IP, SN, MAC, CID, Type, and SDK. A 'Custom Info' section has fields for Name and Position. At the bottom right are buttons for '+ Manual Add', '+ Add Select', 'Modify', and 'Delete'. Red circles and boxes highlight specific elements: ① points to the 'Device Manage' button; ② points to the 'Name' field in the Custom Info section; ③ points to the 'Position' field in the Custom Info section. The 'Name' and 'Position' fields are also highlighted with red boxes.

- ①面遷移し、再度左上の出現したDeviceを選択し、青く反転させる。
- ②画面下部のNameに任意の文字を入力。
- ③画面下部のPositionに任意で文字を入力。

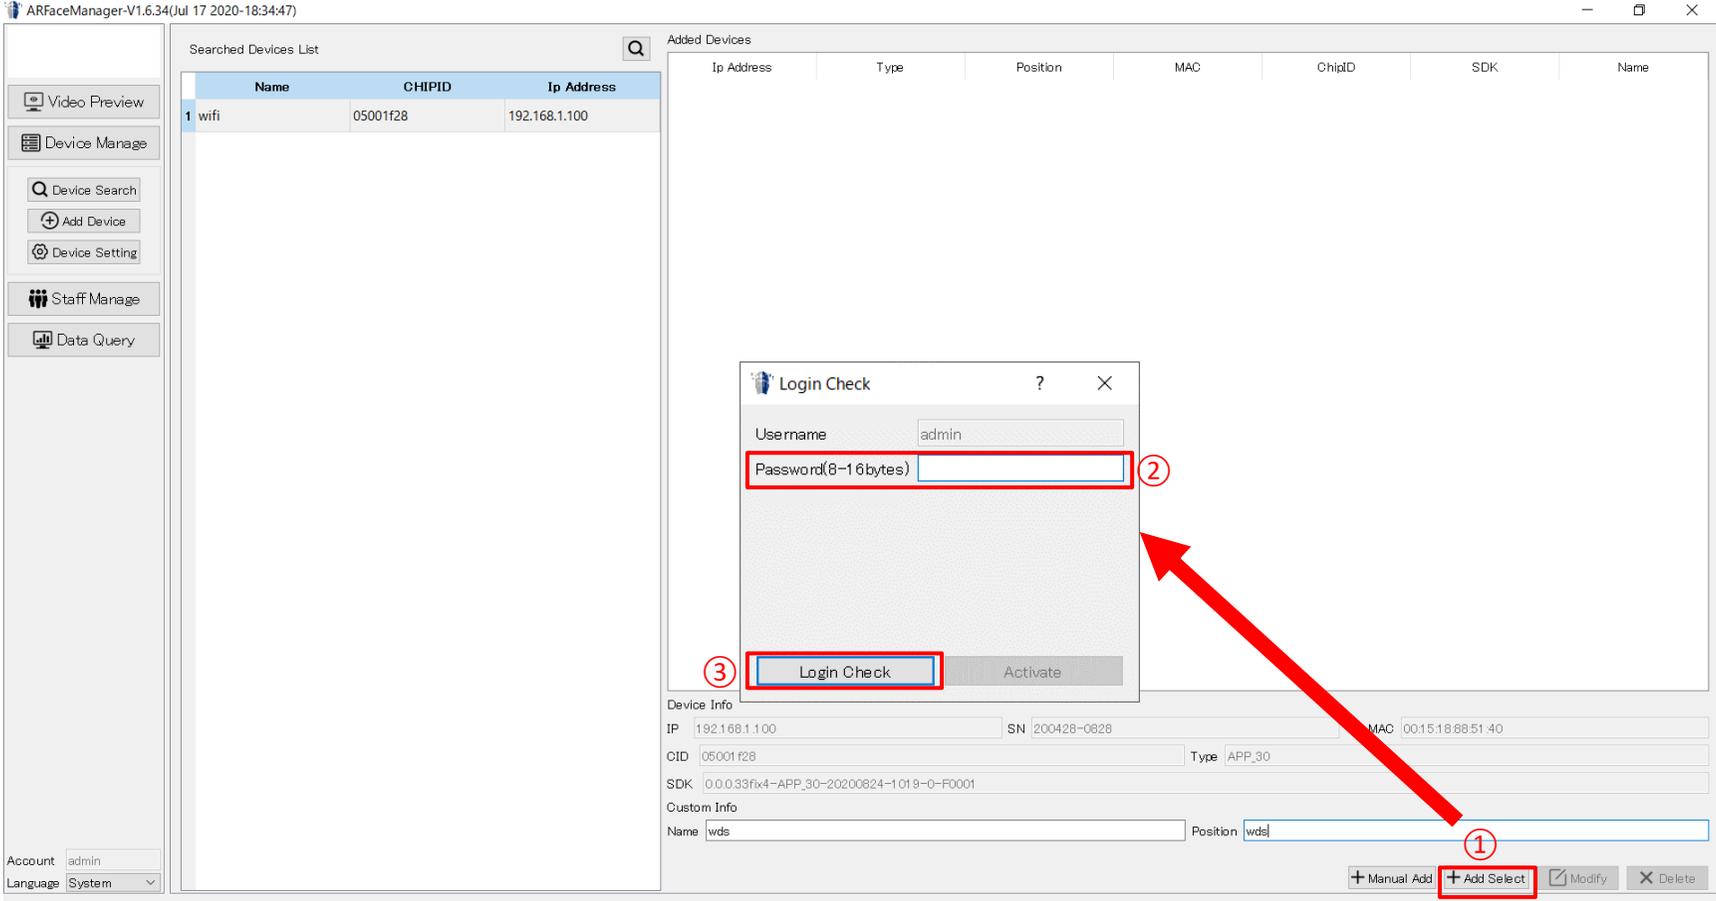

The screenshot shows the ARFaceManager V1.6.34 interface. On the left is a sidebar with navigation options: Video Preview, Device Manage, Device Search, Add Device, Device Setting, Staff Manage, and Data Query. The main area is divided into 'Searched Devices List' and 'Added Devices'. The 'Searched Devices List' contains one entry: 'wifi' with CHIPID '05001f28' and IP Address '192.168.1.100'. The 'Added Devices' table is empty. A 'Login Check' dialog box is open, showing 'Username' as 'admin' and a 'Password(8-16 bytes)' field. A red box highlights the password field (2). Below the dialog, a 'Login Check' button is highlighted with a red box (3). At the bottom right of the main interface, a '+ Add Select' button is highlighted with a red box (1). A red arrow points from the '+ Add Select' button to the 'Login Check' dialog.

Name	CHIPID	Ip Address
1 wifi	05001f28	192.168.1.100

Ip Address	Type	Position	MAC	ChipID	SDK	Name
------------	------	----------	-----	--------	-----	------

Device Info

IP: 192.168.1.100 SN: 200428-0828 MAC: 00:15:18:88:51:40

CID: 05001f28 Type: APP_30

SDK: 0.0.0.33fix4-APP_30-20200824-1018-0-F0001

Custom Info


Name: wds Position: wds

Account: admin Language: System

+ Manual Add + Add Select Modify Delete

- ①画面下部の+ Add Selectをクリック。
- ②Log in時に登録したパスワードを再度入力。
- ③Login Checkをクリックすると、画面遷移。

お問い合わせ先

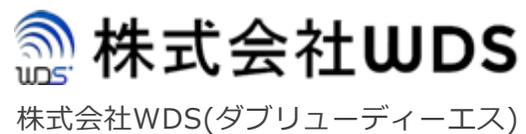

〒116-0013
東京都荒川区西日暮里2-22-1 ステーションプラザタワー504号

メールアドレス : info@wd-s.com